

Reliable, Resistant and Ready for You




Wayne Global Vista™
fuel dispenser



Visit Website

DFS *Worldwide* Brands

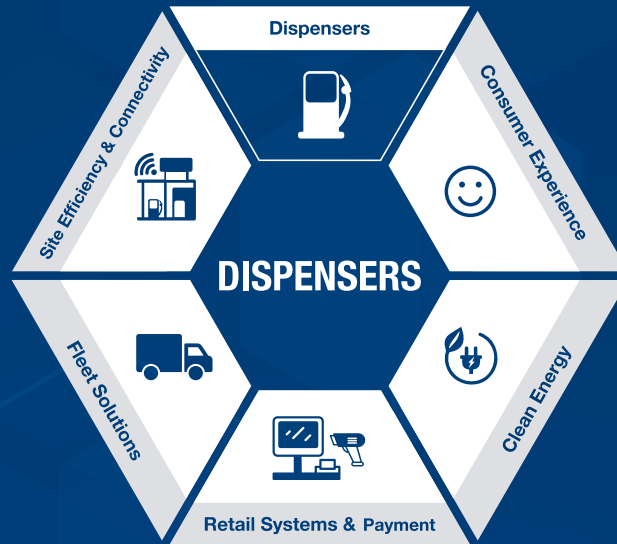

Optimal Performance from Leading Technology

The Wayne Global Vista™ fuel dispenser is built on leading Dover Fueling Solutions® (DFS) leading technology, delivering high performance in a user-friendly equipment. The dispenser is certified against the ATEX, IEC, INMETRO and ABNT standards, with corrosion-resistant materials and global components guaranteeing high productivity, lower maintenance expenses and reduced operational stoppages.

DFS *Worldwide* Brands



High Performance

The Global Vista™ fuel dispenser was designed to address high performance and reliability. With 10 basic configurations and multiple built options, it offers the flexibility of providing up to four products across eight nozzles, with the choice of 50 LPM and 75 LPM flow rates, all in an easy to install and maintain dispenser.

Technical Specifications

Available Grades: 4 products

Available Nozzles: 4 per side (8 total)

Available Flow Rates: 50 LPM, 75 LPM (optional)

Hose Management: Hanging Hoses (standard)

Nozzle Reach: 4m, 4.3m (optional), 4.9m (optional)

Dispenser Orientation: Lane

Display Options: 7-6-5 (Price-Volume-Unit Price)

Vapour Recovery: No

Automatic Temperature Compensation: No

Pump Type: Suction and Remote

ARL32 Configurations: No

LPG Configurations: No

Customized Livery: Yes

Corrosion Resistance: Min. C3, stainless steel doors available for harsh environments

Operating Temperature: -40°C to +55°C

Relative Humidity: Condensing

Dimensions:

1220mm (L) x 508mm (W) x 2388mm (H)

891mm (L) x 508mm (W) x 2388mm (H)

