



# Add Power, Add Finesse, AdBlue®


Wayne Century<sup>™</sup> 3 AdBlue<sup>®</sup> dispenser



DFS Worldwide Brands

**DOVER** 

TOKHEM ProGauge fairbanks



## The Blue That Makes Diesel Greener

The Wayne Century<sup>™</sup> 3 AdBlue<sup>®</sup> fuel dispenser brings AdBlue<sup>®</sup> fluid dispensing to your fleet or retail fuel location in a discrete, compact framework. Due to its small size, it's the perfect solution for businesses wanting convenient, powerful AdBlue<sup>®</sup> refueling capabilities on-site without compromising on forecourt space.


This compact AdBlue<sup>®</sup> dispenser leverages decades of hydraulic innovation and is modular, meaning that you're able to design the dispenser you need to best provide for your business outlet.

Discretion is the name of the game for this powerful AdBlue<sup>®</sup> model. It combines understated beauty with incredible power, preferring to adopt a modest approach when it comes to shouting about its top-of-the-range, inbuilt technology. The Century<sup>™</sup> 3 AdBlue<sup>®</sup> dispenser is the player you want on your team. It's the all-star champion when it comes to AdBlue<sup>®</sup> dispensing.

DFS Worldwide Brands



Wayne OPVV ClearView AvaLAN HBulloch

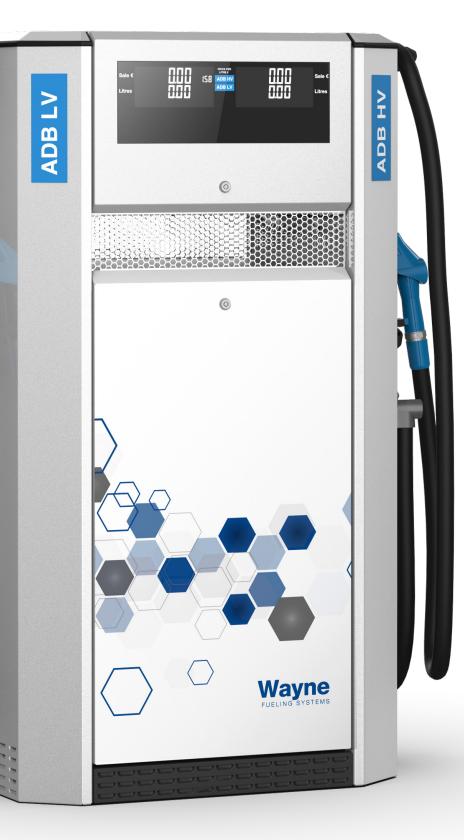

## Little, but Living It Large

## **Configure It, Win With It**

The Century<sup>™</sup> 3 AdBlue<sup>®</sup> fuel dispenser is built with modularity in mind. We've given you the freedom to pick and choose the features best suited to your business model, so your resulting AdBlue<sup>®</sup> dispenser is nothing less than perfection.

## Hardy, Strong, Tough

Developed by experts, this incredibly durable dispenser has been designed to offer your business a long lifetime of service. Constructed with premium, corrosion-resistant materials and superior componentry, the Century<sup>™</sup> 3 AdBlue<sup>®</sup> dispenser is well and truly built to last.

## **Reliable Performance**

As with all of our Wayne Century<sup>™</sup> dispensers, the Wayne Century<sup>™</sup> 3 AdBlue<sup>®</sup> dispenser benefits from our leading technology that has proven itself time and time again, both in our engineering labs and out in the field. Engineered with components especially treated to handle corrosive AdBlue<sup>®</sup> liquid, you can be confident that this fuel dispenser won't let you down when it comes to accurate AdBlue<sup>®</sup> dispensing.

### Low Total Cost of Ownership (TCO)

The Century<sup>™</sup> 3 AdBlue<sup>®</sup> dispenser is here to offer a long lifetime of service to your business. Less service interventions mean that this dispenser is able to effectively deliver a low TCO, whilst continuing to bring you reliable performance and stability.



## Data Sheet / Wayne Century® 3 AdBlue® dispenser

#### Add Speed, Add Finesse, AdBlue®

#### **Fuel Compatibility**

- AdBlue
- Diesel Exhaust Fluid (DEF)

#### **Model Availability**

- Orientation: Island. Dual-sided or Single-Sided
- Grades available: 1
- Nozzles available: 1 or 2
- Hydraulic System: Remote Pressure
- Hose Management: Hose Hook or Hose Mast
- Flow Rates available: 10 or 20 lpm

#### **Hose Reach**

- Hose Mast: 4.0 meter reach
- Hose Hook: 4.0 meter reach

#### **Electronics**

iGem pump computer

#### **Displays**

• Premium 7-6-5 LED with 1.15" digits

#### **Totalizers**

Electromechanical 7-digit totalizers

#### **Communciation Protocol**

DART as standard. Other protocols available

#### Metering

- Secure intelligent pulser
- Electronic calibration
- Piston meter technology using P-Meter

#### Heating

- Optional heating system available
- Non-ATEX heating

#### Branding

• Optional customized graphics.

#### **Materials**

- Painted hot dipped galvanized steel frame
- Painted hit dipped galvanized steel cladding

#### **Corrosion Protection**

 C4 protection according to ISO12944-2:1998 as standard. Optional C5 protection available.

#### **Operating temperature**

- From -25°C to +55°C as standard
- Optional low tempaerature kit option for extended temperature range -40°C to +60°C

#### **Relative Humidity**

From 5% to 95%

#### **IP Rating**

• IP 54 electronic head

#### Certifications

- ATEX
- OIMLMID





© 2024 Dover Fueling Solutions®. All rights reserved. DOVER®, the DOVER® D Design, DOVER FUELING SOLUTIONS®, and other trademarks referenced herein are trademarks of Delaware Capital Formation, Inc./Dover Corporation, Dover Fueling Solutions® UK Ltd. and their affiliated entities, registered or used in the United States and/or various other countries. 31.JUL.24